

# D23-XXX300/450R

Door type: door panel width mm ( $X_{total}$ ), max opening mm

D23-XXX300R: 500 - 3000 mm, 381 - 2881 mm


D23-XXX450R: 750 - 4500 mm, 611 - 4361 mm

XXX= Height on posts



Total width of door (300R)=4490 mm (max)=Y+X1+X2+90

Total width of door (450R)=6070 mm (max)=Y+X1+X2+X3+70

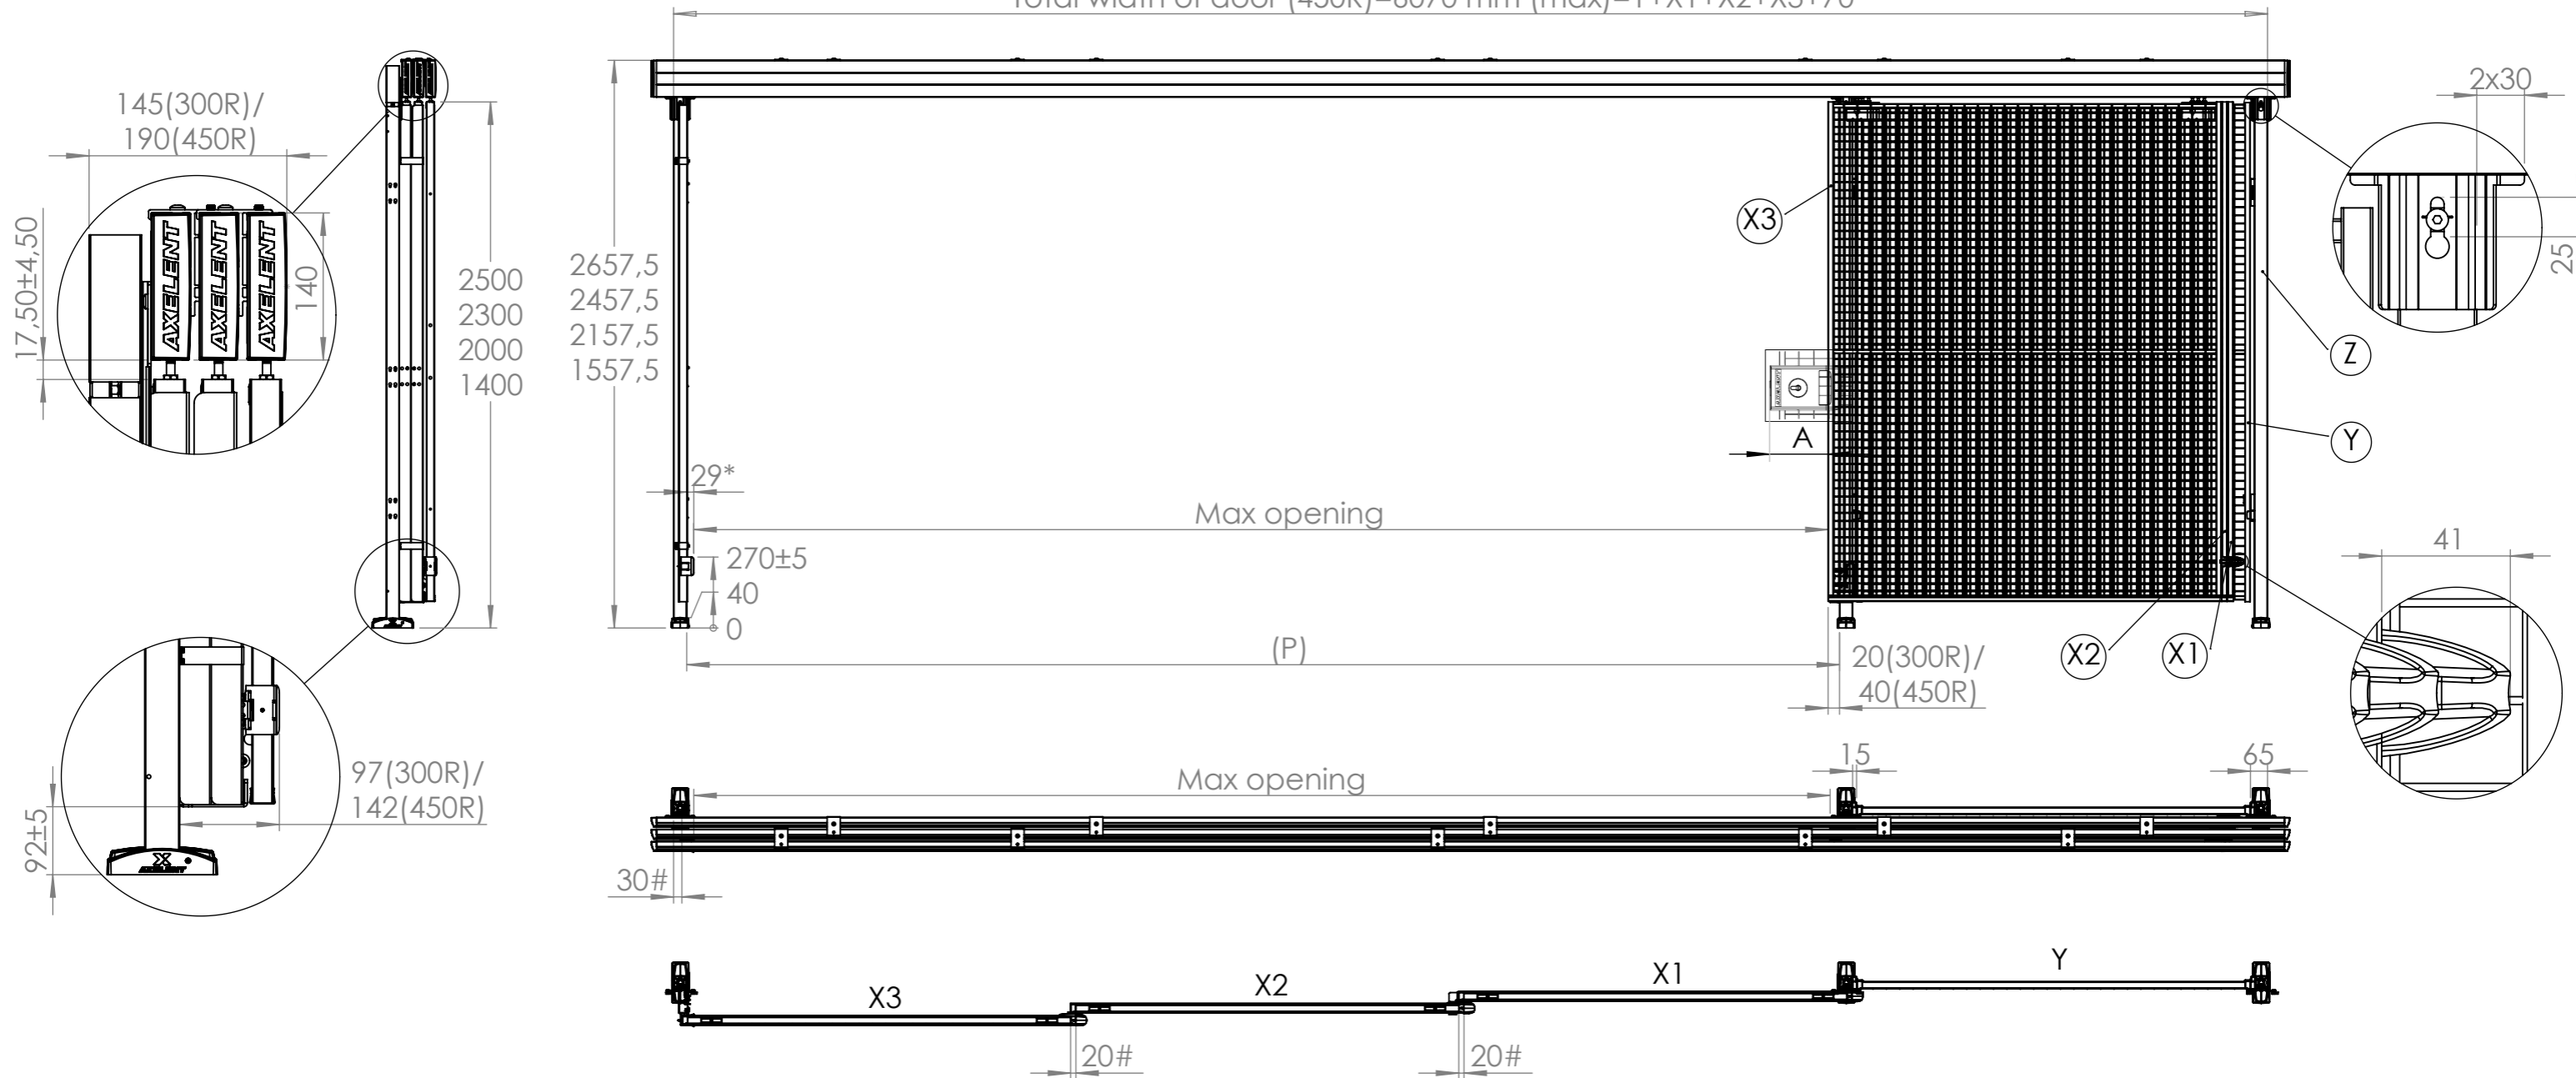

**Max opening (300R) = X (total panel width) - 119 mm** ( $119 \text{ mm} = (\text{door accessories}^*) + 70 + 20(\text{panels overlapping})$ )

**Max opening (450R) = X (total panel width) - 139 mm** ( $139 \text{ mm} = (\text{door accessories}^*) + 70 + 40(\text{panels overlapping})$ )

(P) Post to post opening (300R) = X (panel width) - 90 mm\*\* (\*\*= panel in closed position overlapping posts ( $90 \text{ mm} = 50 + 20 + 20$ ))

(P) Post to post opening (450R) = X (panel width) - 110 mm\*\* (\*\*= panel in closed position overlapping posts ( $110 \text{ mm} = 50 + 20 + 40$ ))

30# and 20# = Dimensions in door closed position

Max opening is affected by "A" mm with lock (without door accessories\*)

Item No.	Art No.	Qty.	
		300R	450R
X (1,2..)	322-XXXXXX	2	3
Y	W322-XXXXXX	1	1
Z	P11-XXX	3	3

Locks	A (lock to X1 (300R) / X2 (450R))
L20-05-0 (Snap lock)	-
L20-05-2 (Hitch lock)	105 mm
XIT-L/R01-301 (Cylinder lock)	-
XIT-L/R14-301 (Slam shut)	215 mm
XIT-L/R09-301 (Electric)	-
L66-20/21-L/R (X-lock)	190 mm
B-135 (MGB)	-
B-136 (MGB Escape Release)	135 mm